
The Network Layer: Control Plane

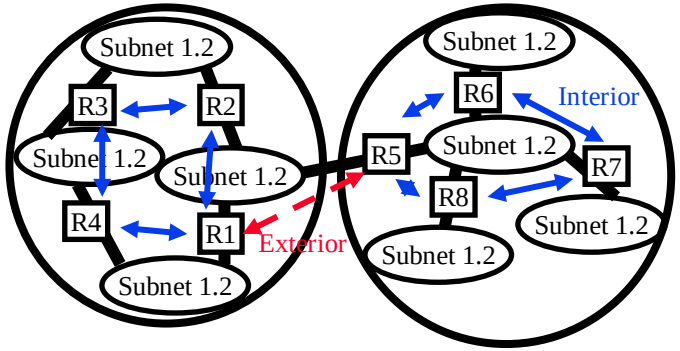

Raj Jain
Washington University in Saint Louis
Saint Louis, MO 63130
Jain@wustl.edu

Audio/Video recordings of this lecture are available online at:

http://www.cse.wustl.edu/~jain/cse4703-26/

Student Questions

©2026 Raj Jain



Overview

1. Routing Algorithms: Link-State, Distance Vector
   Dijkstra's algorithm, Bellman-Ford Algorithm
2. Routing Protocols: OSPF, BGP
3. SDN Control Plane
4. ICMP
5. SNMP

Note: This class lecture is based on Chapter 5 of the textbook (Kurose and Ross) and the figures provided by the authors.

Student Questions

©2026 Raj Jain

Network Layer Functions

- Forwarding: Deciding what to do with a packet using a routing table ⇒ Data plane
- Routing: Making the routing table ⇒ Control Plane

Student Questions

©2026 Raj Jain



Routing Algorithms

1. Graph abstraction
2. Distance Vector vs. Link State
3. Dijkstra's Algorithm
4. Bellman-Ford Algorithm

Student Questions

©2026 Raj Jain

Rooting or Routing

- *Rooting* is what fans do at football games, what pigs do for truffles under oak trees in the Vaucluse, and what nursery workers intent on propagation do to cuttings from plants.
- *Routing* is how one creates a beveled edge on a tabletop or sends a corps of infantrymen into a full-scale, disorganized retreat.

Student Questions

Ref: Piscitello and Chapin, "Open Systems Networking: TCP/IP and OSI," Adison-Wesley, 1993, p413

©2026 Raj Jain

Routeing or Routing


- Routeing: British
- Routing: American
- Since the Oxford English Dictionary is much heavier than any other dictionary of American English, British English generally prevails in the documents produced by ISO and CCITT; wherefore, most of the international routing standards use the routeing spelling.

Student Questions

Ref: Piscitello and Chapin, "Open Systems Networking: TCP/IP and OSI," Adison-Wesley, 1993, p413

©2026 Raj Jain

Graph abstraction

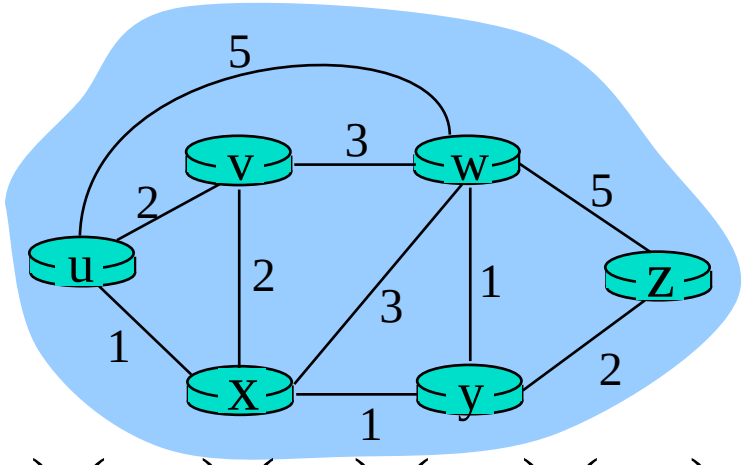

- Graph: G = (N, E)
- N = Set of routers
  = { u, v, w, x, y, z }
- E = Set of links
  ={ (u,v), (u,x), (u,w), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) }
- Each link has a cost, e.g., c(w,z) = 5
- Cost of path $(x_1, x_2, \ldots, x_p) = c(x_1,x_2) + c(x_2,x_3) + \ldots + c(x_{p-1},x_p)$
- Routing Algorithms find the least cost path
- We limit to "Undirected" graphs, i.e., the cost is the same in both directions


Student Questions

©2026 Raj Jain

Distance Vector vs. Link State

Distance Vector:

- Vector of distances to all nodes, e.g., u: {u:0, v:2, w:5, x:1, y:2, z:4}
- Sent to neighbors, e.g., u will send to v, w, x
- Large vectors to a small # of nodes Tell about the world to neighbors.
- Older method. Used in RIP.

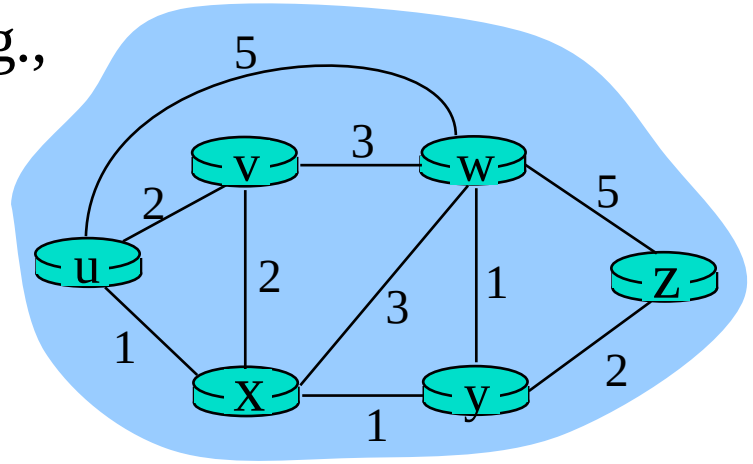

Link State:

- Vector of link cost to neighbors, e.g., u: {v:2, w:5, x:1}
- Sent to all nodes, e.g., u will send to v, w, x, y, z
- Small vectors to a large # of nodes Tell about the neighbors to the world
- Newer method. Used in OSPF.

Student Questions

©2026 Raj Jain


Dijkstra's Algorithm

- Goal: Find the least cost paths from a given node to all other nodes in the network
- Notation:
  c(i,j) = Link cost from i to j if i and j are connected
  D(k) = Total path cost from s to k
  N' = Set of nodes so far for which the least cost path is known
- Method:
  - Initialize: N'={u}, D(v) = c(u,v) for all neighbors of u
  - Repeat until N includes all nodes:
    - Find node $w \notin N'$, whose D(w) is the minimum
    - Add w to N'

Student Questions

©2026 Raj Jain

Dijkstra's Algorithm: Example

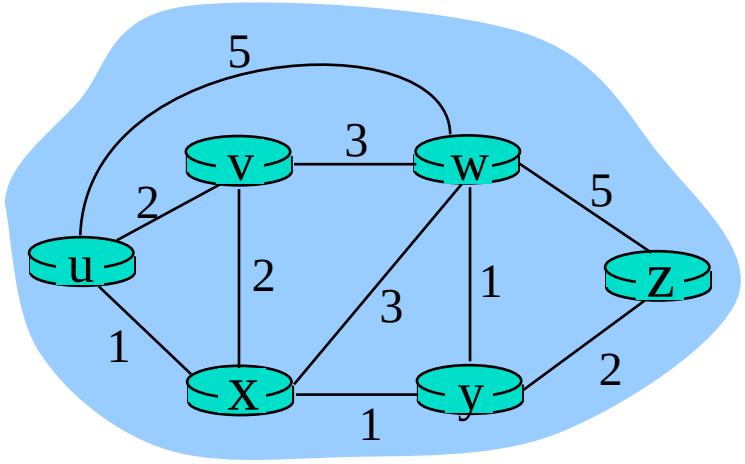


	N'	D(v)	Path	D(w)	Path	D(x)	Path	D(y)	Path	D(z)	Path
0	{u}	2	u-v	5	u-w	1	u-x	∞	-	∞	-
1	{u, x}	2	u-v	4	u-x-w			2	u-x-y	∞	-
2	{u, x, y}	2	u-v	3	u-x-y-w					4	u-x-y-z
3	{u, x, y, v}			3	u-x-y-w					4	u-x-y-z
4	{u, x, y, v, w}									4	u-x-y-z
5	{u, x, y, v, w, z}										

Student Questions

©2026 Raj Jain

Complexity and Oscillations

- *Algorithm complexity: n* nodes
  - Each iteration: need to check all nodes, *w*, not in N
  - $n(n+1)/2$ comparisons: $O(n^2)$
  - More efficient implementations possible: $O(n \log n)$
- *Oscillations Possible:* e.g., support link cost equals the amount of carried traffic

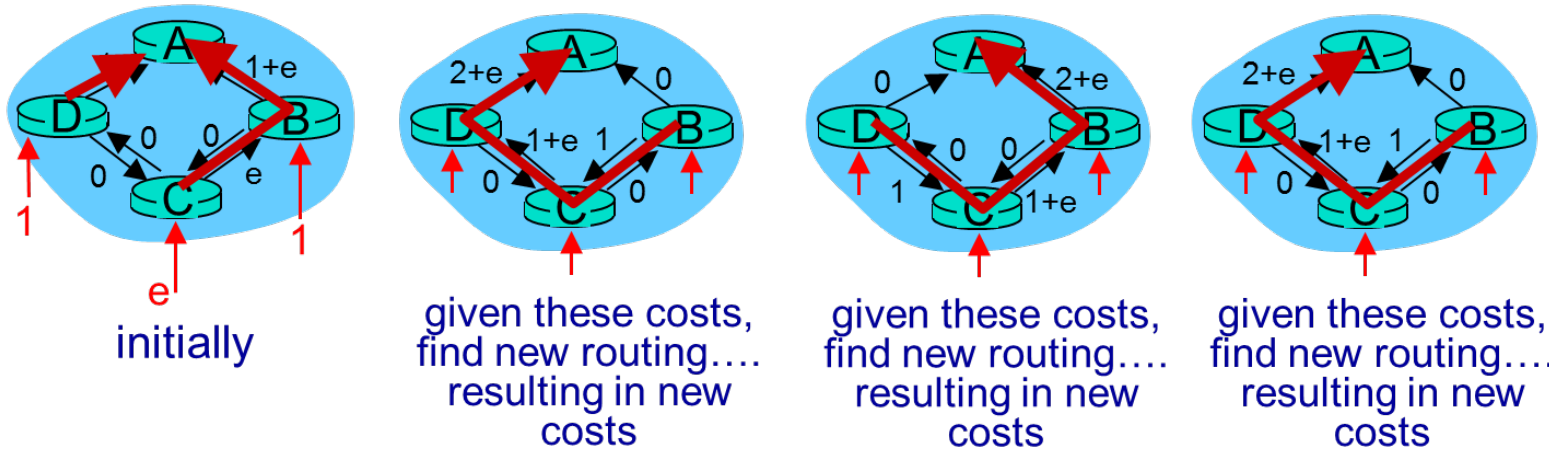


Student Questions

©2026 Raj Jain

Homework 5A

[12 points] Prepare the routing calculation ***table*** for node 1 in the following network using Dijkstra's algorithm. Explain how you computed new entries in each row.

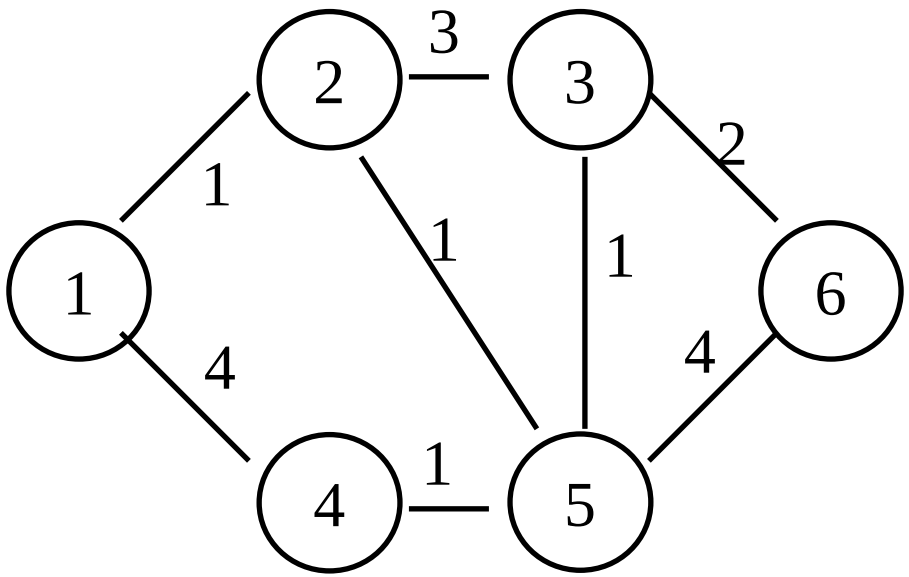

Student Questions

End of Part 1

Bellman-Ford Algorithm

- Notation:
  u = Source node
  c(i,j) = link cost from i to j
  h = Number of hops being considered
  $D_u(n)$ = Cost of h-hop path from u to n
- Method:
  1. Initialize: $D_u(n) = \infty$ for all $n \neq u$; $D_u(u) = 0$
  2. For each node: $D_u(n) = \min_j [D_u(j) + c(j, n)]$
  3. If any costs change, repeat step 2

Student Questions

©2026 Raj Jain

Bellman Ford Example 1

node x table

from	cost to x	cost to y	cost to z
x	0	2	7
y	∞	∞	∞
z	∞	∞	∞

from	cost to x	cost to y	cost to z
x	0	2	3
y	2	0	1
z	7	1	0

from	cost to x	cost to y	cost to z
x	0	2	3
y	2	0	1
z	3	1	0

node y table

from	cost to x	cost to y	cost to z
x	∞	∞	∞
y	2	0	1
z	∞	∞	∞

from	cost to x	cost to y	cost to z
x	0	2	7
y	2	0	1
z	7	1	0

from	cost to x	cost to y	cost to z
x	0	2	3
y	2	0	1
z	3	1	0


node z table

from	cost to x	cost to y	cost to z
x	∞	∞	∞
y	∞	∞	∞
z	7	1	0

from	cost to x	cost to y	cost to z
x	0	2	7
y	2	0	1
z	3	1	0

from	cost to x	cost to y	cost to z
x	0	2	3
y	2	0	1
z	3	1	0

time

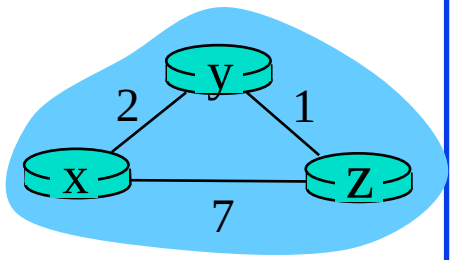


Student Questions


©2026 Raj Jain

Bellman-Ford Example 2


A.

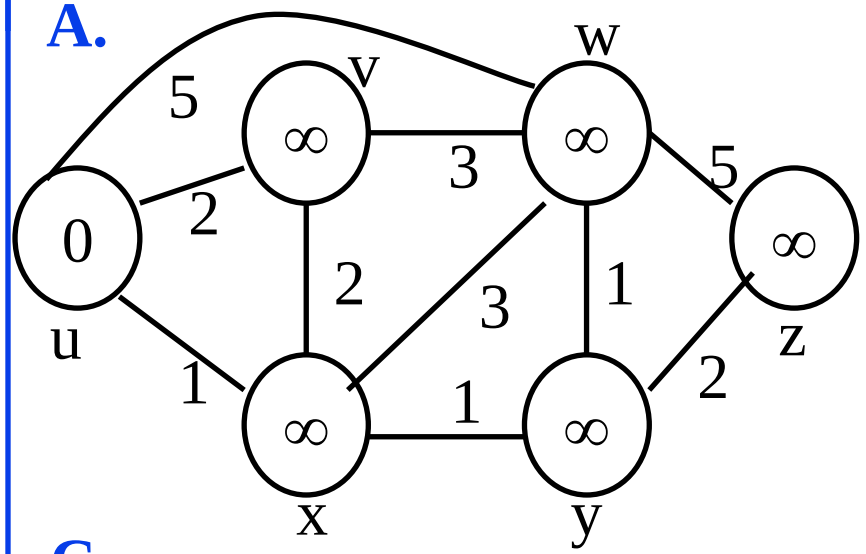


B.

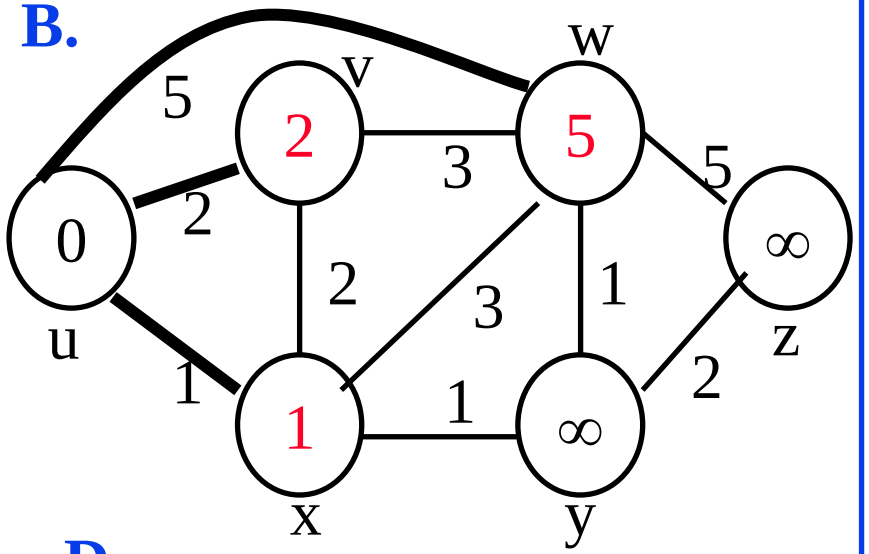

C.

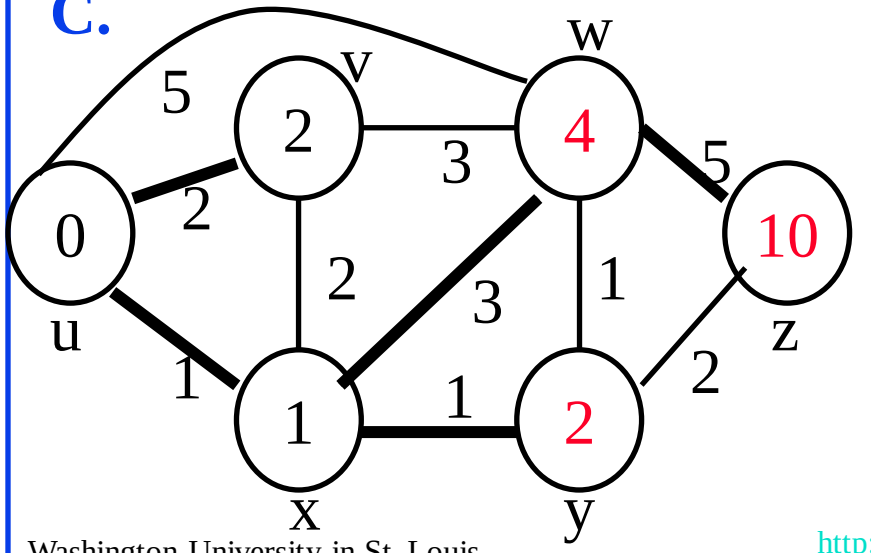


D.

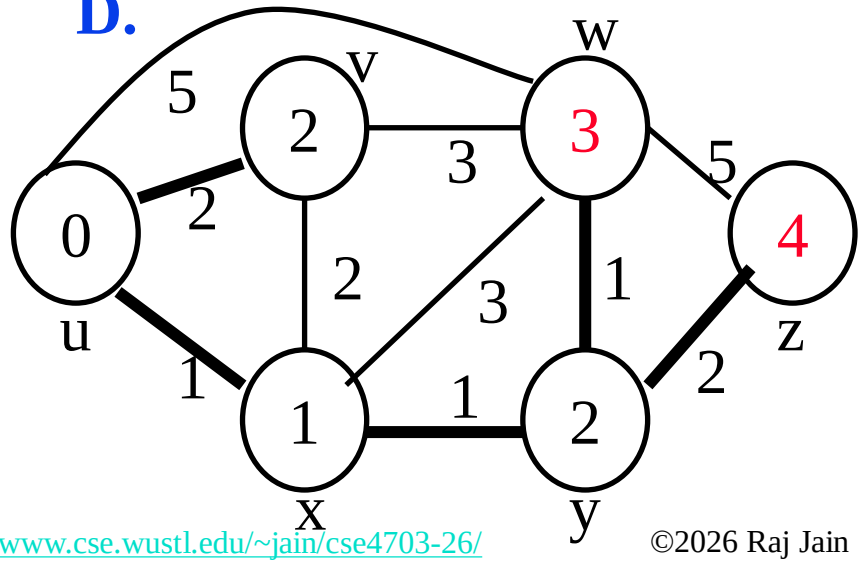

Student Questions

©2026 Raj Jain

Bellman-Ford: Tabular Method

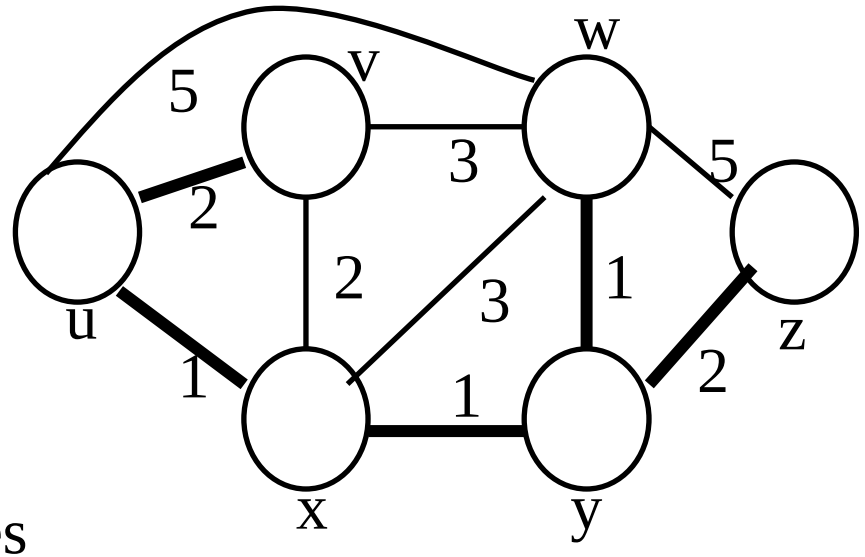

If cost changes


⇒ Recompute the costs to all neighbors

h	D(v)	Path	D(w)	Path	D(x)	Path	D(y)	Path	D(z)	Path
0	∞	-	∞	-	∞	-	∞	-	∞	-
1	2	u-v	5	u-w	1	u-x	∞	-	∞	-
2	2	u-v	4	u-x-w	1	u-x	2	u-x-y	10	u-w-z
3	2	u-v	3	u-x-y-w	1	u-x	2	u-x-y	4	u-x-y-z
4	2	u-v	3	u-x-y-w	1	u-x	2	u-x-y	4	u-x-y-z

Student Questions

©2026 Raj Jain

Counting to Infinity Problem

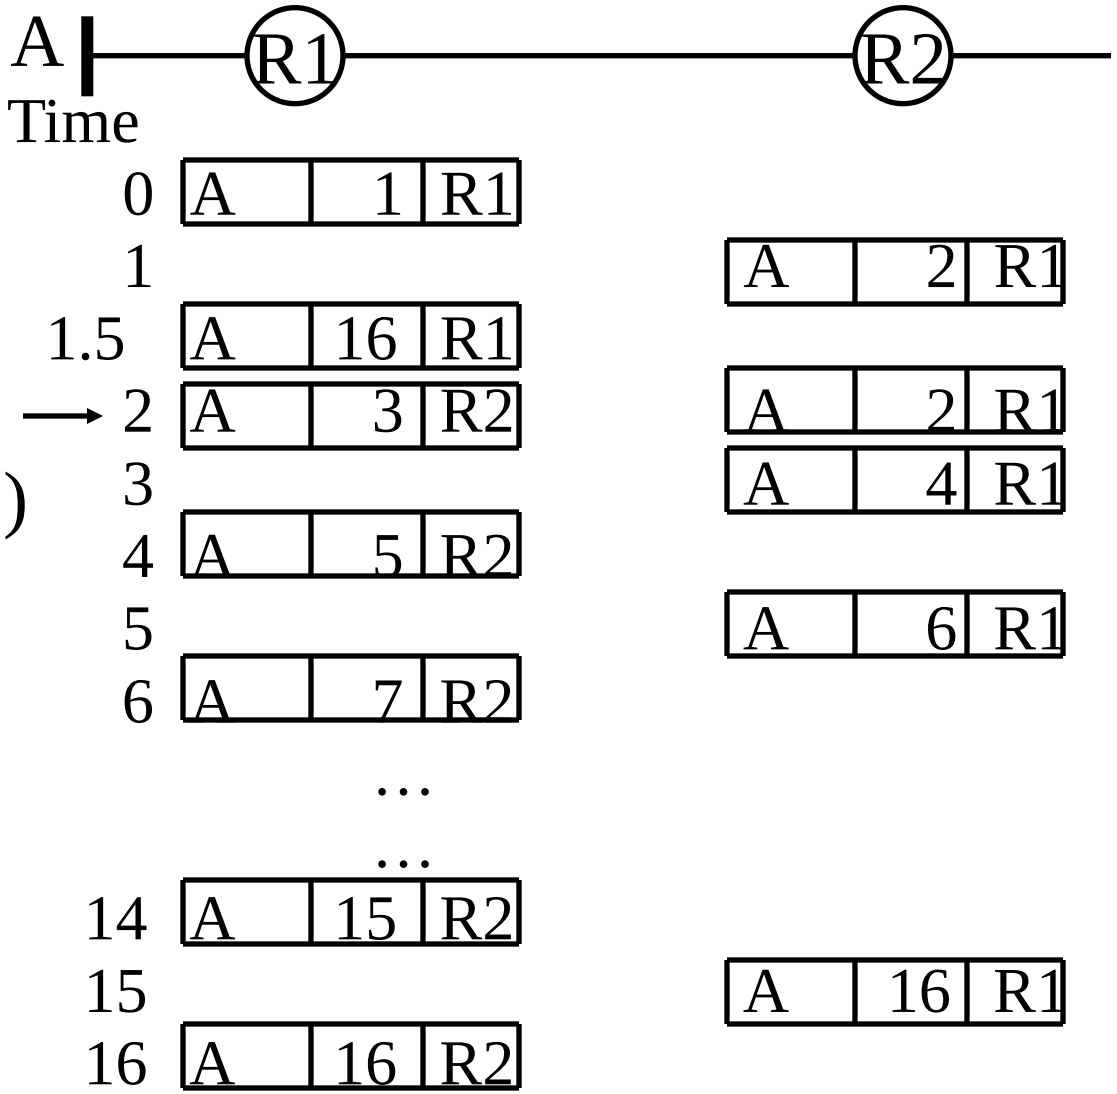


Student Questions

- Why does the count-to-infinity problem happen in distance vector routing?

When a link breaks, the distances to other nodes do not change in a single cycle. In link-state routing, the bad news is broadcast to the entire network in a single cycle.

©2026 Raj Jain



Routing Algorithms: Summary

1. Distance Vectors: Distance to all nodes in the network sent to neighbors. Small # of large messages.
2. Link State: Cost of link to neighbors sent to the entire network. Large # of small messages.
3. Dijkstra's algorithm is used to compute the shortest path using the link state
4. Bellman-Ford's algorithm is used to compute shortest paths using distance vectors
5. Distance Vector algorithms suffer from the count-to-infinity problem


Student Questions

Ref: Read Section 5.2 of the textbook and try review questions R3-R6.

©2026 Raj Jain

Homework 5B

[10 points] Prepare the routing calculation ***table*** for node 1 in the following network using the Bellman-Ford Algorithm. Explain how you computed new entries in each row.

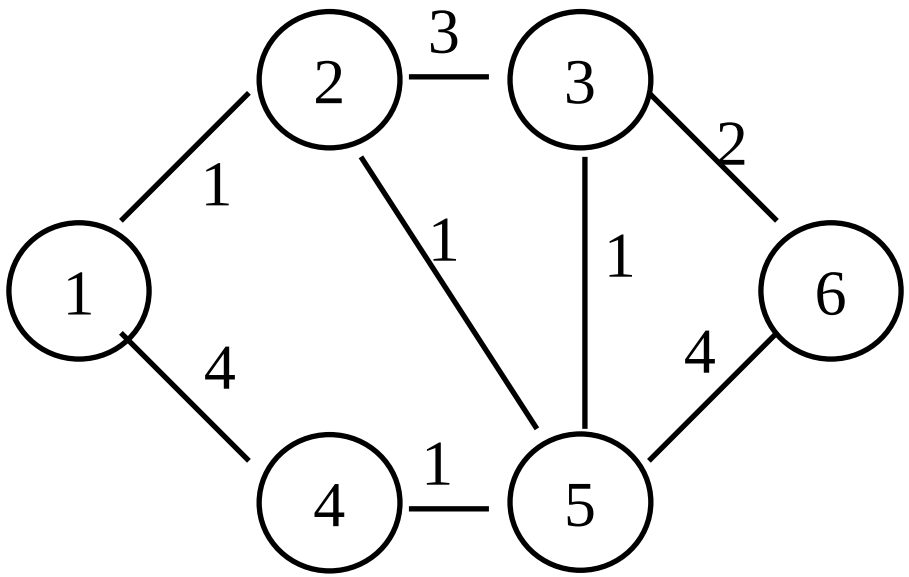

Student Questions

©2026 Raj Jain



Routing Protocols


1. Autonomous Systems (AS)
2. Open Shortest Path First (OSPF)
   - OSPF Areas
3. Border Gateway Protocol (BGP)

Student Questions

©2026 Raj Jain

Autonomous Systems

- An internet connected by homogeneous routers under the administrative control of a single entity

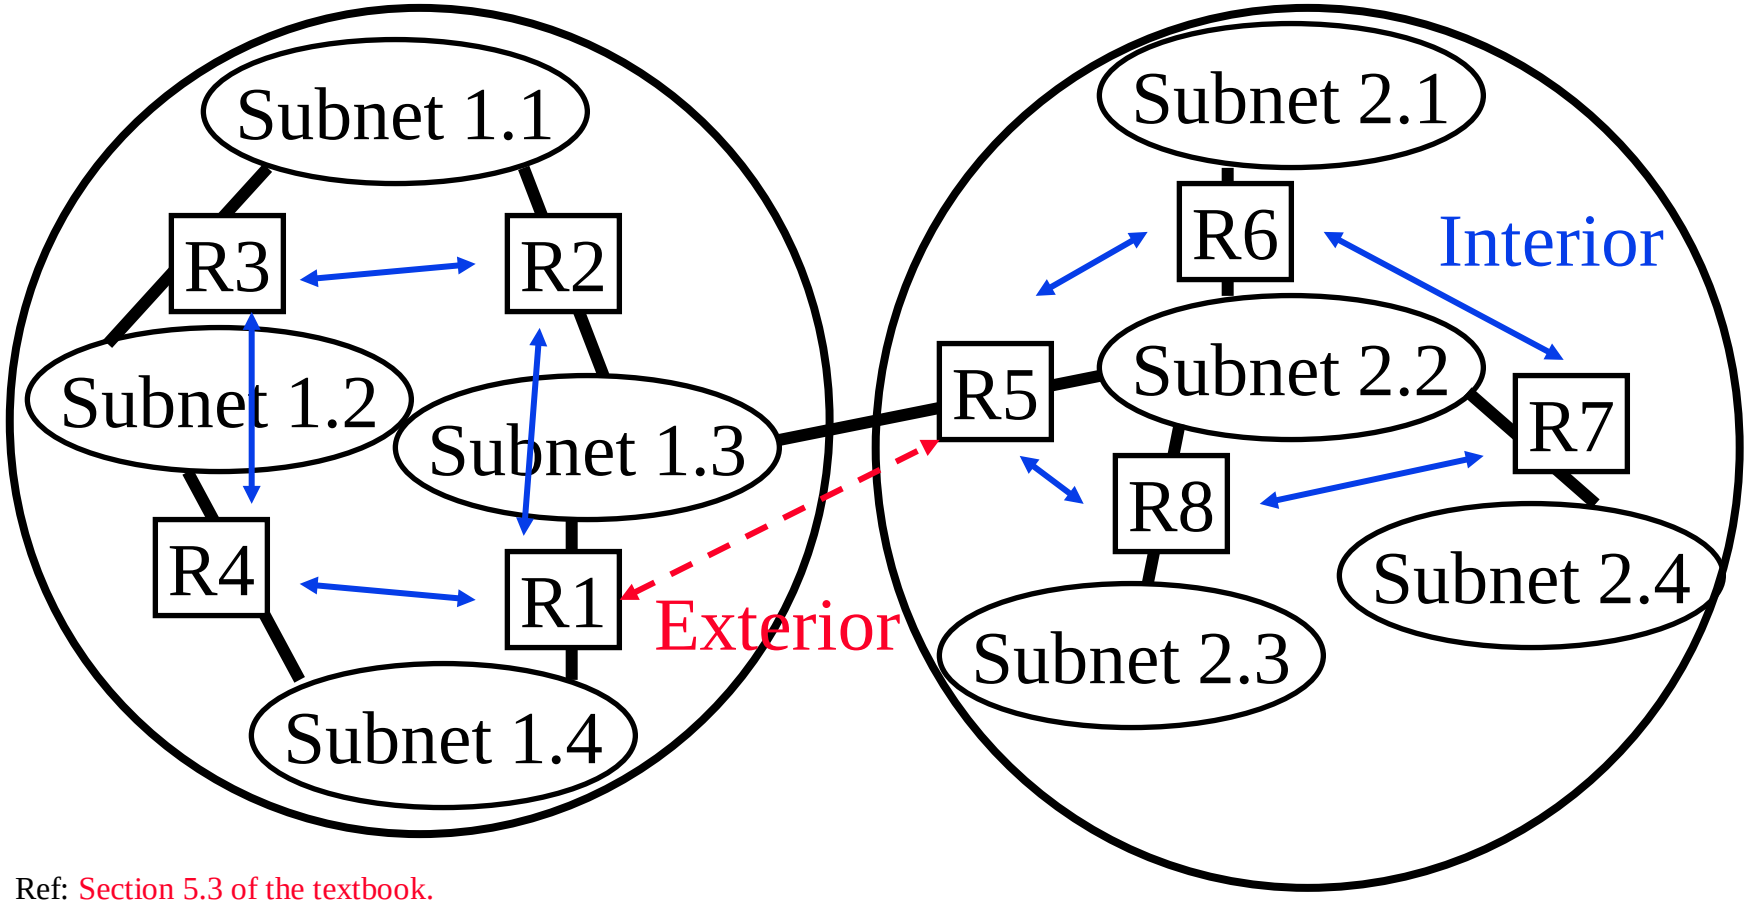

Ref: Section 5.3 of the textbook.

©2026 Raj Jain

Student Questions

Routing Protocols

- Interior Router Protocol (IRP): Used for passing routing information among routers internal to an autonomous system. Also known as IGP.
  - Examples: RIP, OSPF, IGRP
- Exterior Router Protocol (ERP): Used for passing routing information among routers between autonomous systems. Also known as EGP.
  - Examples: EGP, BGP, IDRP
    Note: EGP is a class as well as an instance in that class.

Student Questions

©2026 Raj Jain

Open Shortest Path First (OSPF)

- Uses true metrics (not just hop count)
- Uses subnet masks
- Allows load balancing across equal-cost paths
- Supports type of service (ToS)
- Allows external routes (routes learned from other autonomous systems)
- Authenticates route exchanges
- Quick convergence
- Direct support for multicast
- Link state routing ⇒ Each router broadcasts its connectivity with neighbors to the entire network


Student Questions

- Can you explain open-shortest path first?

Open standard for finding the shortest path (using Dijkstra's algorithm to find the path through the entire network) and use it rather than anything else. So the protocol messages consist of advertising link state to the entire network.

©2026 Raj Jain

OSPF Areas

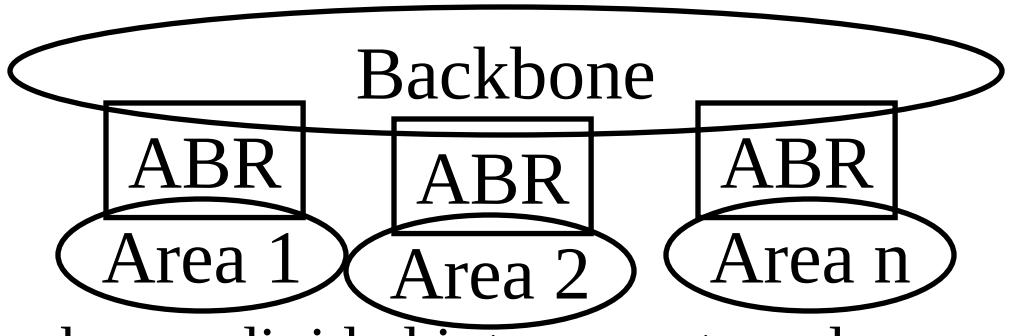


- Large networks are divided into areas to reduce routing traffic.
- Link-State Advertisements (LSAs) are flooded throughout the area.
- Area border routers (ABRs) summarize and transmit the topology to the backbone area.
- Backbone routers forward it to other areas
- ABRs connect an area with the backbone area.
  ABRs contain OSPF data for all backbone areas.
- If there is only one area in the AS, there is no backbone area and no ABRs.

Student Questions

©2026 Raj Jain

Border Gateway Protocol

- Inter-autonomous system protocol [RFC 1267]
- Used since 1989 but not extensively until recently
- Runs on TCP (segmentation, reliable transmission)
- Advertises all transit ASs on the path to a destination address
- A router may receive multiple paths to a destination ⇒ Can choose the best path
- iBGP is used to forward paths between two peers in the same AS. eBGP is used to exchange paths between ASs.

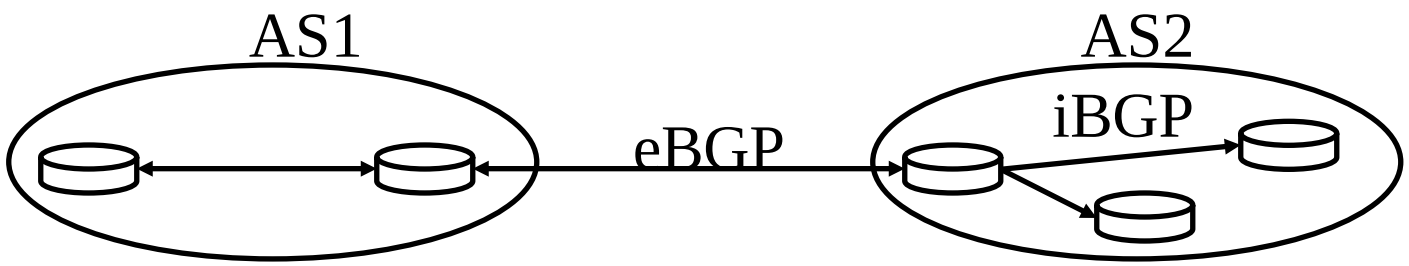

Ref: Section 5.4 of the textbook.

Student Questions

©2026 Raj Jain

BGP Operations

- BGP systems initially exchange all the routing tables. Afterward, only updates are exchanged.
- BGP messages have the following information:
  - Origin of path information: RIP, OSPF, …
  - AS_Path: List of ASs on the path to reach the destination
  - Next_Hop: IP address of the border router to be used as the next hop to reach the destination
  - Unreachable: If a previously advertised route has become unreachable
- BGP speakers generate update messages to all peers when they select a new route or when some route becomes unreachable.


Student Questions

- How are the BGP attributes constructed (especially AS-PATH and NEXT-HOP), and how are they exactly used by routers? Also, where are these attributes found so that BGP routers can access them?

Each AS admin programs the policies in their edge routers. So the routers calculate the path using those polices and advertise them. The next hop is just the first entry in that path.

©2026 Raj Jain

BGP Routing Policy Example

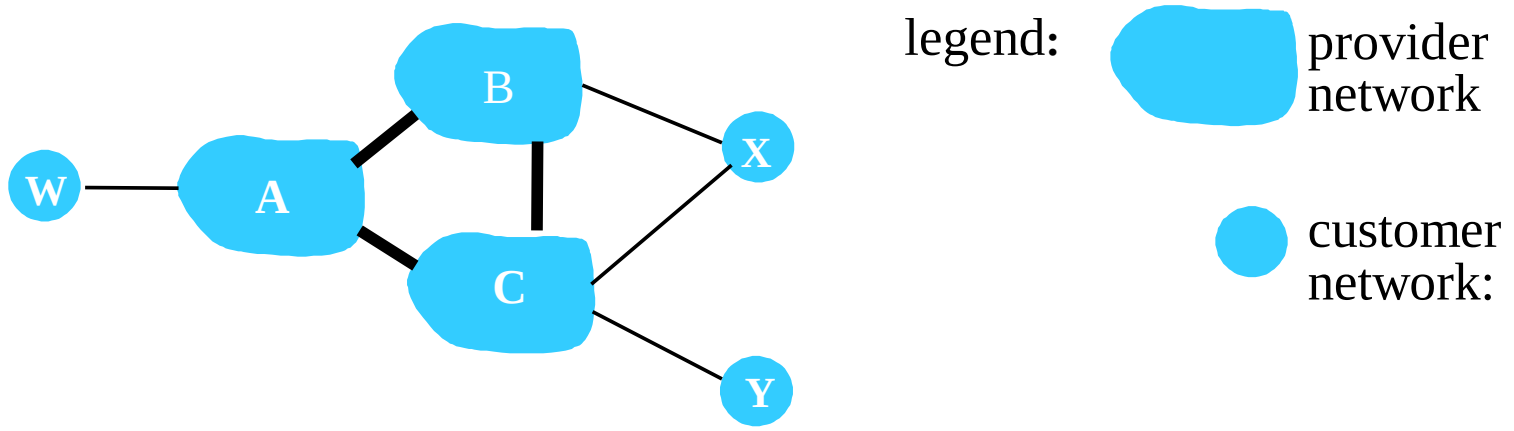


- A, B, C are provider networks
- X, W, and Y are customers (of provider networks)
- X is dual-homed: attached to two networks
  - X does not want to route from B via X to C
  - .. so X will not advertise to B a route to C

Student Questions

©2026 Raj Jain

BGP Routing Policy Example (Cont)

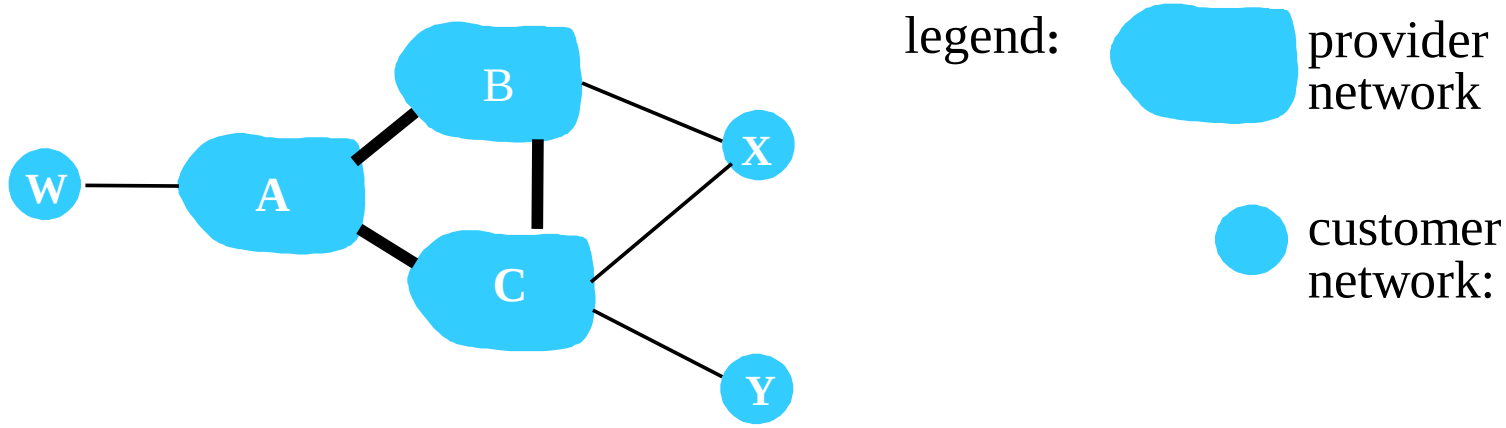

- A advertises path A-W to B
- B advertises path B-A-W to X
- Should B advertise path B-A-W to C?
  - No way! B gets no "revenue" for routing C-B-A-W since neither W nor C is B's customer
  - B wants to force C to route to W via A
  - B wants to route *only* to/from its customers!

Student Questions

- Could you explain how advertising paths work, specifically regarding customer advertising (to not get unwanted ISP traffic) and ISPs advertising to not allow revenue-free traffic?

The AS admin programs what traffic to accept. Transit polices are also programmed (just like at airports).


©2026 Raj Jain

Intra- vs. Inter-AS Routing

- **Policy:**
  - Inter-AS: The admin wants control over how its traffic is routed and who routes through its network.
  - Intra-AS: single admin, so no policy decisions are needed
- **Scale**:
  - Hierarchical routing saves table size, reduces update traffic
- **Performance**:
  - Intra-AS: can focus on performance
  - Inter-AS: policy may dominate over performance

Student Questions

©2026 Raj Jain



Routing Protocols: Summary


1. OSPF uses link-state routing and divides the autonomous systems into multiple areas.
   Area border router, AS boundary router
2. BGP is an inter-AS protocol ⇒ Policy driven

Student Questions

Ref: Read Section 5.3 and 5.4 of the textbook and try review questions R7-R13.

©2026 Raj Jain

SDN Control Plane

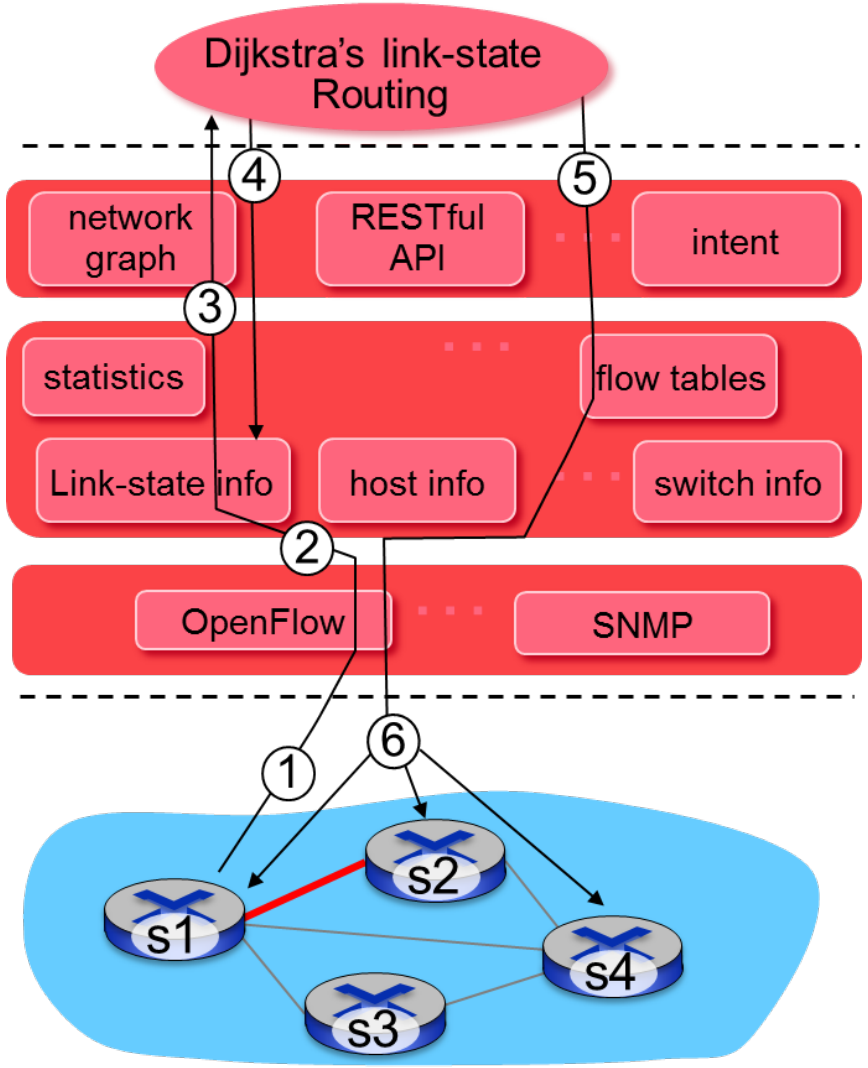

① S1, experiencing link failure using OpenFlow port status message to notify controller

② SDN controller receives OpenFlow message, updates link status info

③ Dijkstra's routing algorithm application has previously registered to be called when ever link status changes. It is called.

④ Dijkstra's routing algorithm access network graph info, link state info in controller, computes new routes

⑤ Controller distributes revised tables. ⑥ Uses OpenFlow


Student Questions

- I thought SDN controllers only communicated with devices that implemented the OpenFlow API. Does this mean regular internal routers can also communicate with the controller?

Yes. SDN is typically used in a data center. All devices in that center, including switches, routers, and middleboxes, follow instructions from the controller. The protocol may be OpenFlow or other protocols, as shown in the OpenDaylight slide.

©2026 Raj Jain

Controller Example: OpenDaylight

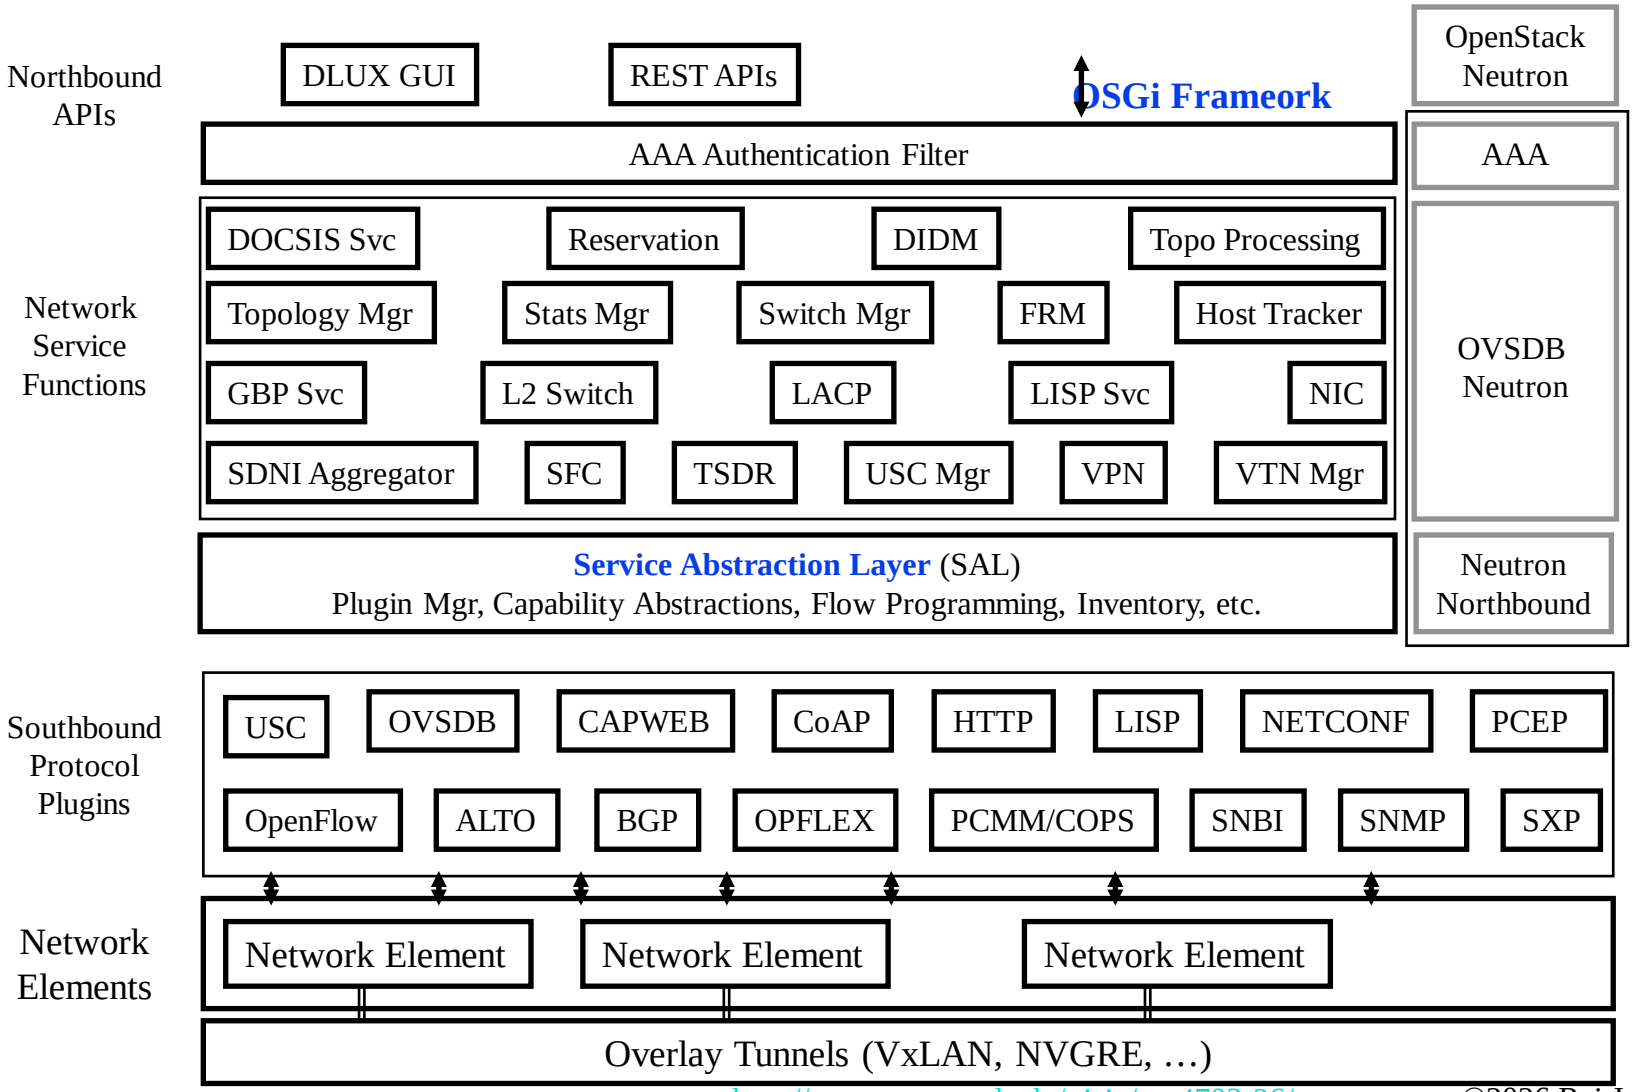

Student Questions

©2026 Raj Jain

OpenDaylight SDN Controller

- Multi-company collaboration under the Linux Foundation
- Many projects, including OpenDaylight Controller
- Dynamically linked into a Service Abstraction Layer (SAL)
  $\Rightarrow$ SAL determines how to fulfill the service requested by higher layers, irrespective of the southbound protocol.
- Modular design
- A rich set of North-bound APIs via RESTful (Web page-like) services


Student Questions

Ref: Read Section 5.5 and try review questions R14-R18.

©2026 Raj Jain

ICMP

- Internet Control Message Protocol
- Required companion to IP. Provides feedback from the network.
- ICMP: Used by IP to send error and control messages
- ICMP uses IP to send its messages (Not UDP)
- ICMP does not report errors on ICMP messages.
- ICMP reports an error only on the first fragment

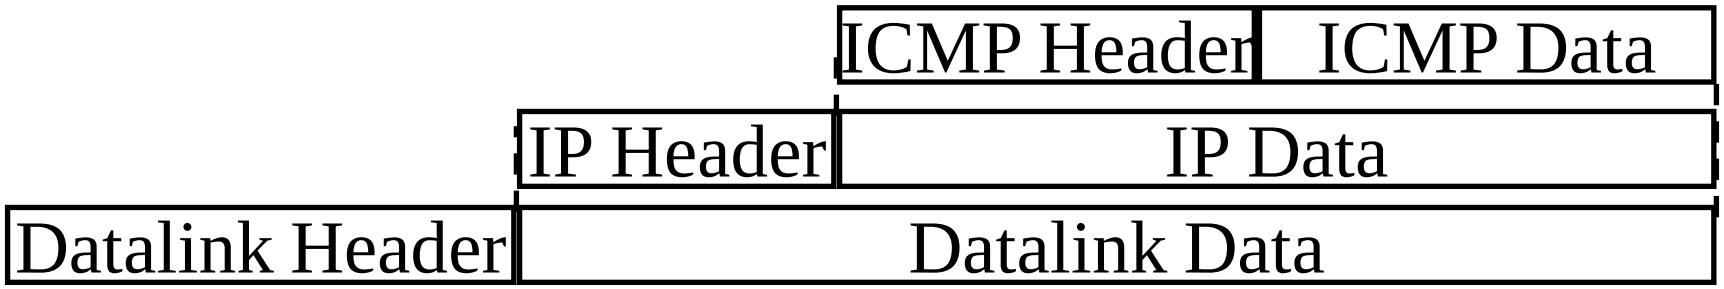


Student Questions

©2026 Raj Jain

End of Part 2

ICMP: Message Types

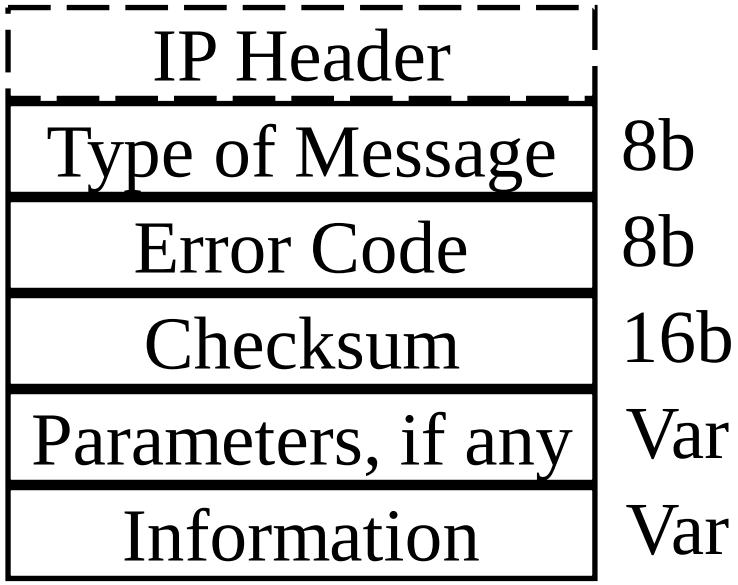

Type	Message
0	Echo reply
3	Destination unreachable
4	Source quench
5	Redirect
8	Echo request
11	Time exceeded
12	Parameter unintelligible
13	Time-stamp request
14	Time-stamp reply
15	Information request
16	Information reply
17	Address mask request
18	Address mask reply

Student Questions

©2026 Raj Jain

ICMP Messages

- Source Quench: Please slow down!
  I just dropped one of your datagrams.
- Time Exceeded: Time to live field in one of your packets became zero." or "Reassembly timer expired at the destination.
- Fragmentation Required: Datagram was longer than MTU, and "No Fragment bit" was set.
- Address Mask Request/Reply: What is the subnet mask on this net? Replied by "Address mask agent".
- PING uses ICMP echo
- Tracert uses TTL expired (Time Exceeded)

Student Questions

Ref: Read Section 5.6 of the textbook and try erview questions R19-R20.

©2026 Raj Jain

Trace Route Example

C:\>tracert www.google.com

Tracing route to www.l.google.com [74.125.93.147]
over a maximum of 30 hops:

1	3 ms	1 ms	1 ms	192.168.0.1
2	12 ms	10 ms	9 ms	bras4-l0.stlsmo.sbcglobal.net [151.164.182.113]
3	10 ms	8 ms	8 ms	dist2-vlan60.stlsmo.sbcglobal.net [151.164.14.163]
4	9 ms	7 ms	7 ms	151.164.93.224
5	25 ms	22 ms	22 ms	151.164.93.49
6	25 ms	22 ms	22 ms	151.164.251.226
7	30 ms	28 ms	28 ms	209.85.254.128
8	61 ms	57 ms	58 ms	72.14.236.26
9	54 ms	52 ms	51 ms	209.85.254.226
10	79 ms	160 ms	67 ms	209.85.254.237
11	66 ms	57 ms	68 ms	64.233.175.14
12	60 ms	58 ms	58 ms	qw-in-f147.google.com [74.125.93.147]

Trace complete.

Student Questions

©2026 Raj Jain

Lab 5A: ICMP

- [14 points] Download the Wireshark traces from http://gaia.cs.umass.edu/wireshark-labs/wireshark-traces.zip
- Open *icmp-ethereal-trace-1* in Wireshark. Select **View → Expand All**. Answer the following questions:

1. Examine Frame 3.
   - A. What is the IP address of your host? What is the IP address of the destination host?
   - B. Why does an ICMP packet not have source and destination port numbers?
   - C. What are the ICMP type and code numbers? What other fields does this ICMP packet have? How many bytes are the checksum, sequence number, and identifier fields?

Student Questions

©2026 Raj Jain

Lab 5A (Cont)

2. Examine Frame 4. What are the ICMP type and code numbers?

- Open *icmp-ethereal-trace-2* in Wireshark. Answer the following questions:

3. Examine Frame 2. What fields are included in this ICMP error packet?

4. Examine Frames 100, 101, and 102. How are these packets different from the ICMP error packet 2? Why are they not error packets?

Student Questions

©2026 Raj Jain



Network Management

- What is Network Management?
- Components of Network Management
- How is Network Managed?
- SNMP protocol

Student Questions

©2026 Raj Jain

What is Network Management?

- Traffic on Network = Data + Control + Management
- **Data** = Bytes/Messages sent by users
- **Control** = Bytes/messages added by the system to properly transfer the data (e.g., routing messages)
- **Management** = Optional messages to ensure that the network functions correctly and to handle the issues arising from the malfunction of any component
- If all components function properly,
  Control is still required, but management is optional.
- Examples:
  - Detecting failures of an interface card at a host or a router
  - Monitoring traffic to aid in resource deployment
  - Intrusion Detection

Student Questions

©2026 Raj Jain

Components of Network Management

1. **Fault Management**:
   Detect, log, and respond to fault conditions
2. **Configuration Management**:
   Track and control which devices are on or off
3. **Accounting Management**:
   Monitor resource usage for records and billing
4. **Performance Management**:
   Measure, report, analyze, and control traffic, messages
5. **Security Management**:
   Enforce a policy for access control, authentication, and authorization


- **FCAPS**

Student Questions

©2026 Raj Jain

How is Network Managed?

- Management = Initialization, Monitoring, Control
- Manager, Agents, and Management Information Base (MIB)

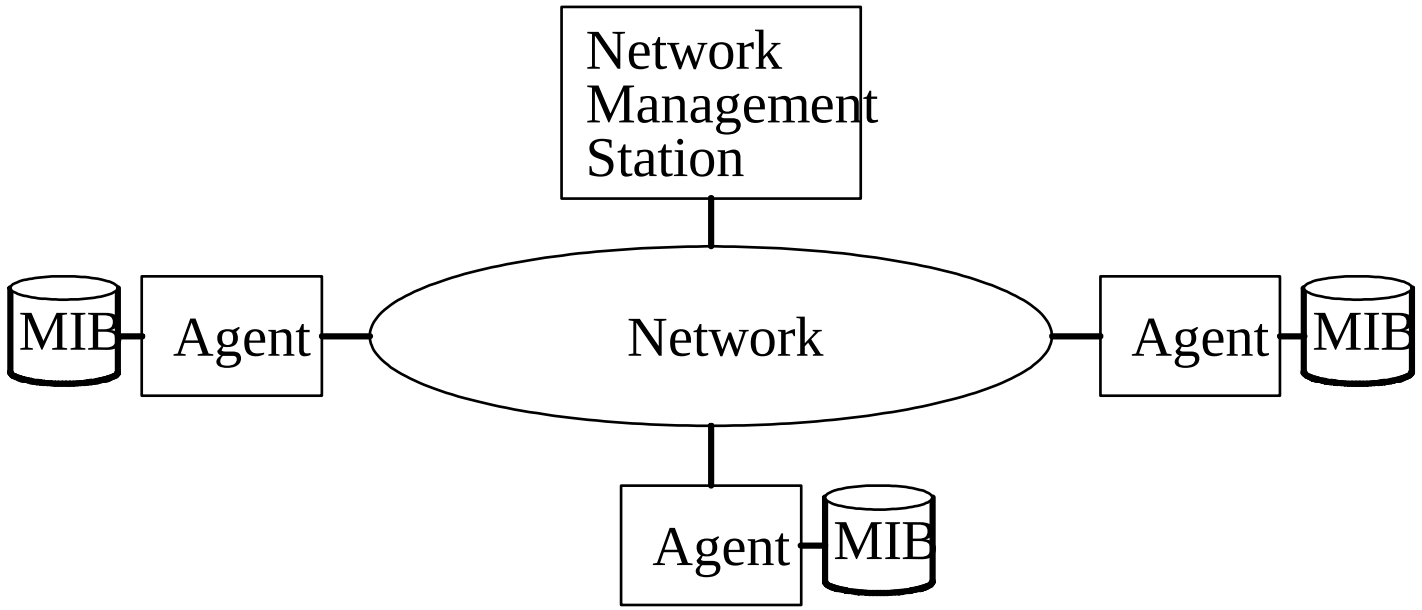


Student Questions

- What is included inside MIB, and why does each agent need 1? Does the manager need 1?

MIB is a database containing all parameters and counters. Each device has one including the managers. Thus human mangers can collect network-wide statistics from one place.

©2026 Raj Jain

Example of Network Management

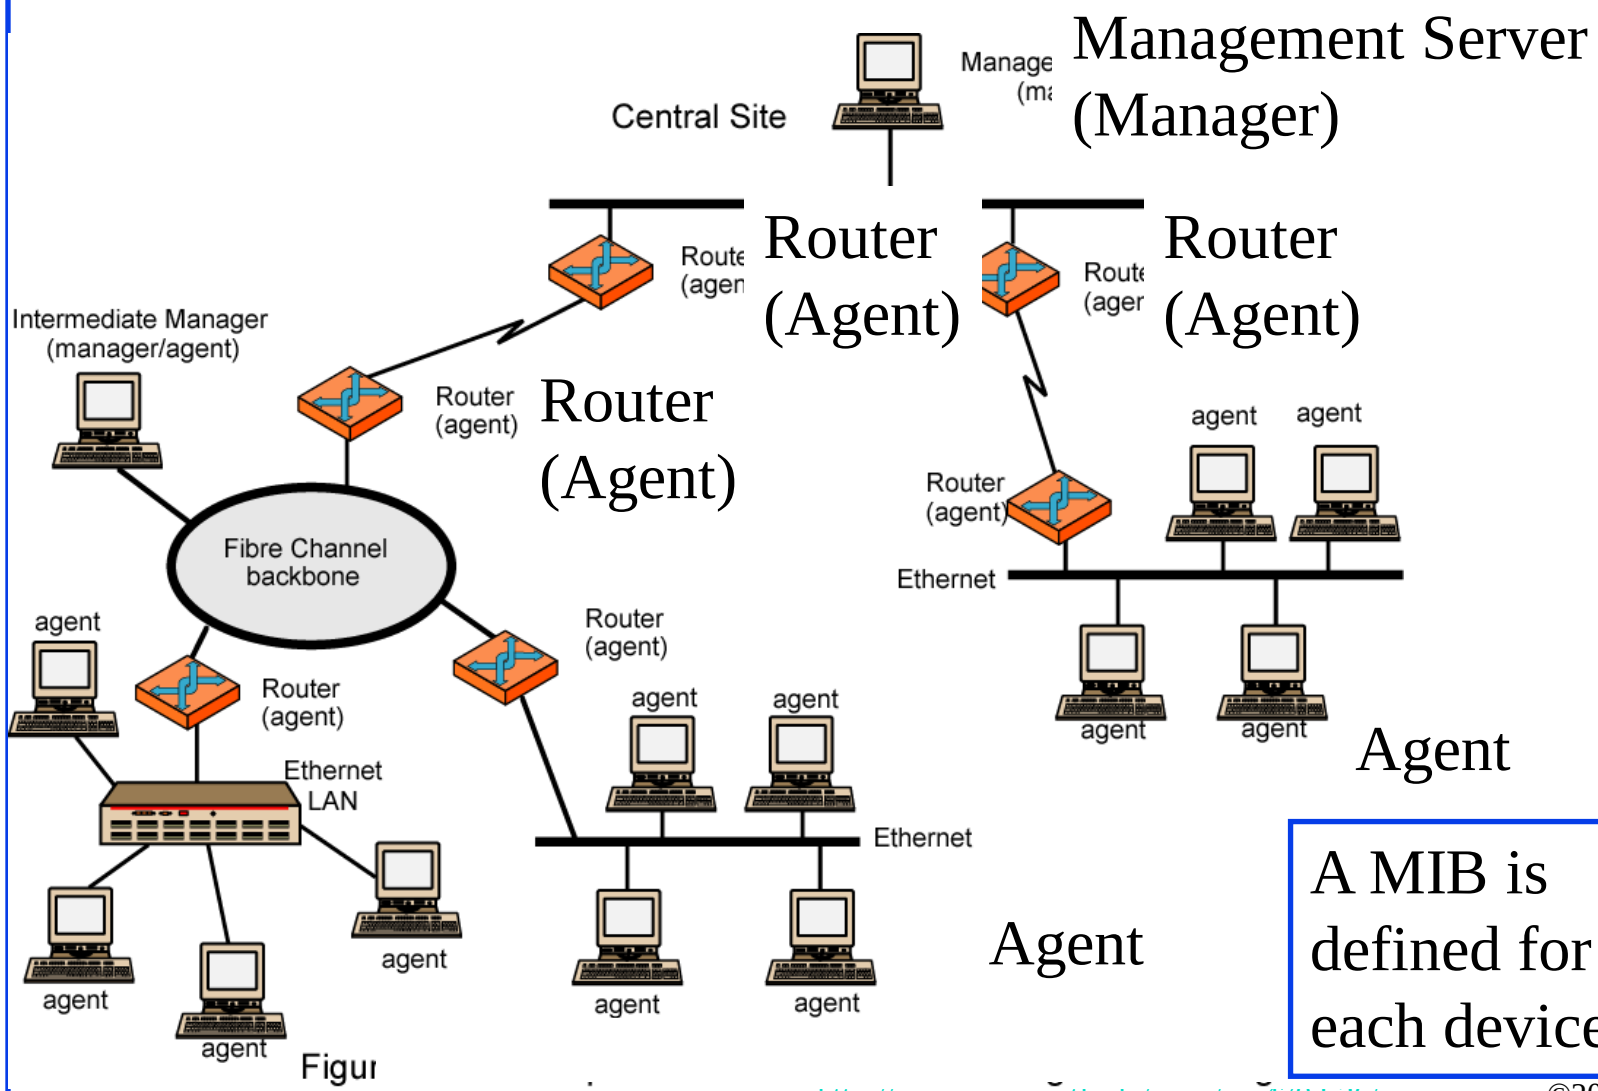

A MIB is defined for each device

Student Questions

SNMP

- Based on Simple Gateway Management Protocol (SGMP) – RFC 1028 – Nov 1987
- SNMP = **S**imply ***N***ot ***M***y ***P***roblem [Marshall Rose]
  Simple Network Management Protocol
- RFC 1058, April 1988
- Only Five commands


Command	Meaning
get-request	Fetch a value
get-next-request	Fetch the next value (in a tree)
get-response	Reply to a fetch operation
set-request	Store a value
trap	An event

Student Questions


©2026 Raj Jain

SNMP protocol

Two ways to convey MIB info, commands:

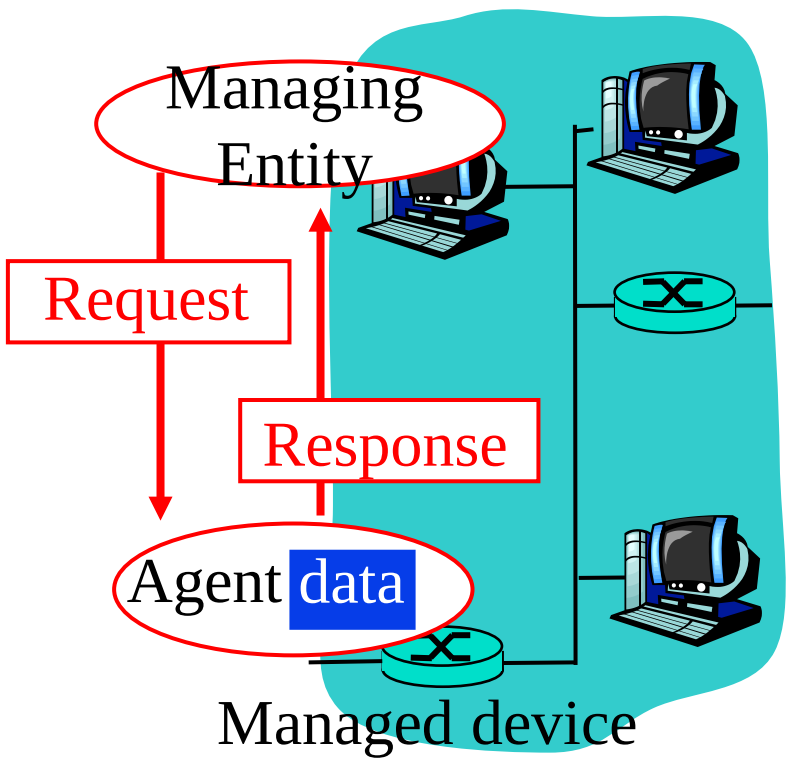

Request/response mode

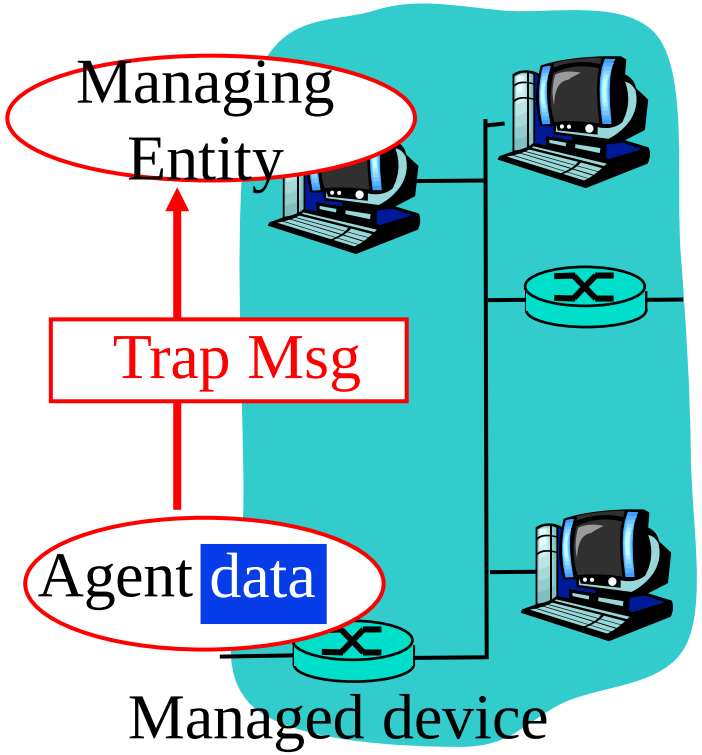

Trap mode


Student Questions

- When will the system perform request/response mode or trap msg mode?

Requests are periodic. Responses are sent only on request. Traps are sent when something unexpected, e.g., failure, happens.


©2026 Raj Jain

SNMP Message Formats

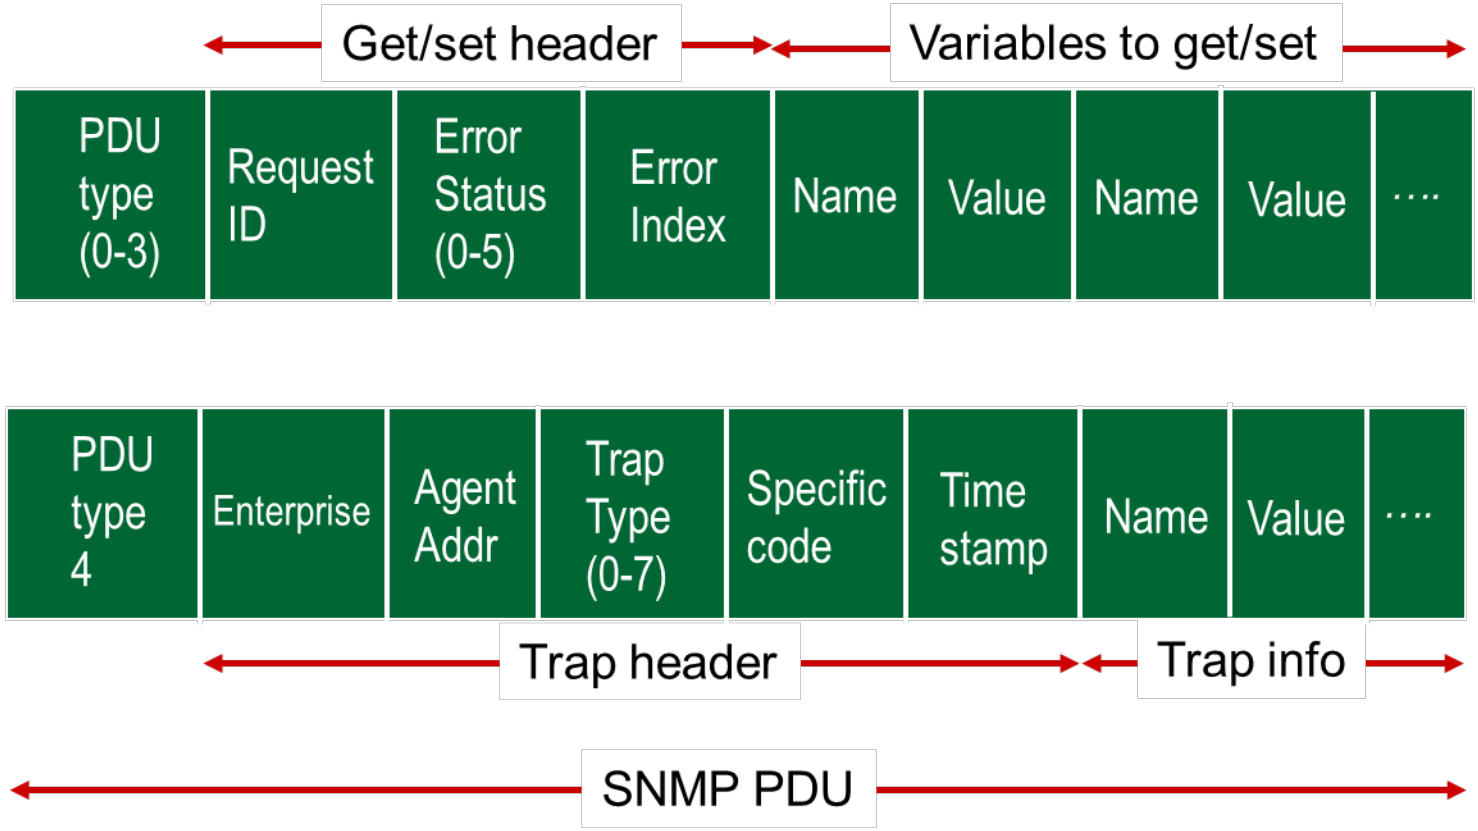

Student Questions

©2026 Raj Jain



Network Management: Summary


1. Management = Initialization, Monitoring, and Control
2. Standard MIBs are defined for each object
3. SNMP = Only five commands in the first version

Student Questions

Ref: Read Section 5.7 of the textbook and try review questions R21-R23.

©2026 Raj Jain

Network Layer Control Plane: Summary

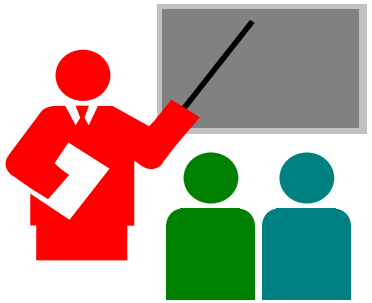

1. Dijkstra's algorithm allows path computation using link state
2. Bellman Ford's algorithm allows path computation using distance vectors.
3. OSPF is a link-state IGP.
4. BGP is an EGP and uses path vectors
5. SDN controllers use various algorithms for the centralized computation of paths and other policies
6. ICMP is an IP control protocol used to convey errors
7. SNMP is the simple network management protocol to manage all devices and protocols in a network

Student Questions

©2026 Raj Jain

Lab 5B: ICMP Ping Programming

[25 points] In this lab, you will better understand the Internet Control Message Protocol (ICMP). You will learn to implement a Ping application using ICMP request and reply messages.

Ping is a computer network application that tests whether a particular host is reachable across an IP network. It is also used to self-test the computer's network interface card or as a latency test. It works by sending ICMP "echo reply" packets to the target host and listening for ICMP "echo reply" replies. The "echo reply" is sometimes called a pong. Ping measures the round-trip time, records packet loss, and prints a statistical summary of the echo reply packets received (the minimum, maximum, and mean of the round-trip times and, in some versions, the standard deviation of the mean).

Your task is to develop your own Ping application in Python. Your application will use ICMP, but to keep it simple, it will not exactly follow the official specification in RFC 1739. Note that you will only need to write the client side of the program, as the functionality needed on the server side is built into almost all operating systems.

You should complete the Ping application so that it sends ping requests to a specified host at approximately 1-second intervals. Each message contains a payload of data that includes a timestamp. After sending each packet, the application waits up to 1 second for a reply. If one second passes without a reply from the server, the client assumes that either the ping or pong packet was lost in the network (or that the server is down).

Student Questions

©2026 Raj Jain

Lab 5B (Cont)

Code

Below is the skeleton code for the client. You are to complete the skeleton code. The places where you need to fill in the code are marked with **#Fill in start** and **#Fill in end**. Each place may require one or more lines of code. This code was written for **Python V2.7** and may not run on higher versions.

Additional Notes

In the "receiveOnePing" method, you must receive the structure ICMP_ECHO_REPLY and fetch the necessary information, such as checksum, sequence number, time to live (TTL), etc. Study the "sendOnePing" method before trying to complete the "receiveOnePing" method.

You do not need to be concerned about the checksum, as it is already in the code.

This lab requires the use of raw sockets. In some operating systems, you may need **administrator/root privileges** to run your Pinger program.

Testing the Pinger

First, test your client by sending packets to localhost (127.0.0.1).

Then, you should see how your Pinger application communicates across the network by pinging servers on different continents. See additional hints on slide 5.56.

What to Hand in

- You will hand in the complete client code and screenshots of your Pinger output for four target hosts: north-america.pool.ntp.org, europe.pool.ntp.org, asia.pool.ntp.org, south-america.pool.ntp.org

Student Questions

©2026 Raj Jain

Lab 5B (Cont)

Skeleton Python Code for the ICMP Pinger

```
from socket import *
import os
import sys
import struct
import time
import select
import binascii
ICMP_ECHO_REQUEST = 8

def checksum(string):
	csum = 0
	countTo = (len(string) // 2) * 2
	count = 0
	while count < countTo:
		thisVal = ord(string[count+1]) * 256 + ord(string[count])
		csum = csum + thisVal
		csum = csum & 0xffffffff
		count = count + 2

	if countTo < len(string):
		csum = csum + ord(string[len(string) - 1])
		csum = csum & 0xffffffff

	csum = (csum >> 16) + (csum & 0xffff)
	csum = csum + (csum >> 16)
	answer = ~csum
	answer = answer & 0xffff
	answer = answer >> 8 | (answer << 8 & 0xff00)
	return answer
```

Student Questions

©2026 Raj Jain

Lab 5B (Cont)

```
def receiveOnePing(mySocket, ID, timeout, destAddr):
    timeLeft = timeout
    while 1:
        startedSelect = time.time()
        whatReady = select.select([mySocket], [], [], timeLeft)
        howLongInSelect = (time.time() - startedSelect)
        if whatReady[0] == []: # Timeout
            return "Request timed out."
        timeReceived = time.time()
        recPacket, addr = mySocket.recvfrom(1024)
        #Fill in start
        #Fetch the ICMP header from the IP packet
        #Fill in end
        timeLeft = timeLeft - howLongInSelect
        if timeLeft <= 0:
            return "Request timed out."
```

Student Questions

©2026 Raj Jain

Lab 5B (Cont)

```
def sendOnePing(mySocket, destAddr, ID):
    # Header is type (8), code (8), checksum (16), id (16), sequence (16)
    myChecksum = 0
    # Make a dummy header with a 0 checksum
    # struct -- Interpret strings as packed binary data
    header = struct.pack("bbHHh", ICMP_ECHO_REQUEST, 0, myChecksum, ID, 1)
    data = struct.pack("d", time.time())
    # Calculate the checksum on the data and the dummy header.
    myChecksum = checksum(str(header + data))

    # Get the right checksum, and put in the header
    if sys.platform == 'darwin':
        # Convert 16-bit integers from host to network byte order
        myChecksum = htons(myChecksum) & 0xffff
    else:
        myChecksum = htons(myChecksum)
    header = struct.pack("bbHHh", ICMP_ECHO_REQUEST, 0, myChecksum, ID, 1)
    packet = header + data

    mySocket.sendto(packet, (destAddr, 1)) # AF_INET address must be tuple, not str
    # Both LISTS and TUPLES consist of a number of objects
    # which can be referenced by their position number within the object.
```

Student Questions

©2026 Raj Jain

Lab 5B (Cont)

```
def doOnePing(destAddr, timeout):
    icmp = getprotobyname("icmp")
    # SOCK_RAW is a powerful socket type. For more details: http://sock-raw.org/papers/sock_raw
    mySocket = socket(AF_INET, SOCK_RAW, icmp)
    myID = os.getpid() & 0xFFFF     # Return the current process i
    sendOnePing(mySocket, destAddr, myID)
    delay = receiveOnePing(mySocket, myID, timeout, destAddr)
    mySocket.close()
    return delay

def ping(host, timeout=1):
    # timeout=1 means: If one second goes by without a reply from the server,
    # the client assumes that either the client's ping or the server's pong is lost
    dest = gethostbyname(host)
    print("Pinging " + dest + " using Python:")
    print("")
    # Send ping requests to a server separated by approximately one second
    while 1 :
            delay = doOnePing(dest, timeout)
            print(delay)
            time.sleep(1)# one second
    return delay
```

Student Questions

©2026 Raj Jain

Lab5B Hints

- You can download the above code from the course website on the page for this module.
- You only need to fill out the unpacking of the ICMP reply, check the ICMP header fields, and return the RTT time.
  The program is supposed to receive ICMP_ECHO_REPLY messages. In the fill area, check the ICMP type, code, and ID. Measure the RTT using the sent time inside the data field of the ICMP_ECHO_REPLY. The code will print a timeout if you don't return the RTT time inside the receiveOnePing function.
- You should have a socket object or something inside the whatReady list
- You do not need to verify the checksum of the ICMP packet.
- Do not run the program on a virtual machine. Otherwise, you may always receive an ICMP packet type 8.
- If you copy the code from the slide, the compiler may miss some indents, resulting in all pings giving timeouts. So make sure that all indents are correct.

Student Questions

©2026 Raj Jain

Lab5B Hints (Cont)

- Ensure that the destination node is up by pinging it first.
- If you remove the calls to ord() in checksum and subsequently don't call str(header + data) and pass in header + data to checksum, it will work in Python 3. What changed between Python 2 and 3 for this was that converting bytes to a string didn't assume any encoding in Python 3, whereas it looked like it assumed some form of 2-byte encoding in Python 2.7.

Student Questions

©2026 Raj Jain

Acronyms

- ABR — Area border router
- API — Application Programming Interface
- AS — Autonomous System
- ASBR — Autonomous System Boundary Router
- BDR — Backup Designated Router
- BGP — Border Gateway Protocol
- BR — Backbone Router
- CAPWAP — Control and Provisioning of Wireless Access Points
- CCITT — Consultative Committee for International Telegraph and Telephone (now ITU-T)
- CoAP — Constrained Application Protocol
- COPS — Common Open Policy Service
- DIDM — Device Identifier and Driver Management
- DLUX — OpenDaylight User Interface
- DOCSIS — Data over Cable Service Interface Specification
- DR — Designated Router
- eBGP — exterior BGP

Student Questions

©2026 Raj Jain

Acronyms (Cont)

- EGP Exterior Gateway Protocol
- ERP Exterior Router Protocol
- FCAPS Fault Configuration, Accounting, Performance, and Security
- FRM Forwarding Rules Manager
- GBP Group-Based Policy
- GUI Graphical User Interface
- HTTP Hyper-Text Transfer Protocol
- iBGP interior BGP
- ICMP IP Control Message Protocol
- ID Identifier
- IDRP ICMP Router Discovery Protocol
- IGP Interior Gateway Protocol
- IGRP Interior Gateway Routing Protocol
- IP Internet Protocol
- IRP Interior Router Protocol
- ISO International Standards Organization

Student Questions

©2026 Raj Jain

Acronyms (Cont)

- LACP Link Aggregation Control Protocol
- LSA Link State Advertisements
- MIB Management Information Base
- MTU Maximum Transmission Unit
- NETCONF Network Configuration Protocol
- NIC Network Interface Card
- OSGi Open Service Gateway Initiative
- OSI Open Service Interconnection
- OSPF Open Shortest Path First
- OVSDB Open V-Switch Database
- PCEP Path Computation Element Protocol
- PCMM Packet Cable Multimedia
- REST Representational State Transfer
- RESTful Representational State Transfer
- RFC Request for Comments
- RIP Routing Information Protocol
- SAL Service Abstraction Layer

Student Questions

©2026 Raj Jain

Acronyms (Cont)

SDN	Software Defined Networking
SDNI	SDN domains interface
SFC	Service Function Chaining
SGMP	Simple Gateway Management Protocol
SNBI	Secure Network Bootstrapping Interface
SNMP	Simple Network Management Protocol
SXP	SGT (Security Group Tags) Exchange Protocol
TCP	Transmission Control Protocol
ToS	Type of Service
TSDR	Time Series Data Repository
TTL	Time to Live
UDP	User Datagram Protocol
USC	Unified Secure Channel
VPN	Virtual Private Network
VTN	Virtual Tenant Network

Student Questions

©2026 Raj Jain

Scan This to Download These Slides



Raj Jain
http://rajjain.com

http://www.cse.wustl.edu/~jain/cse4703-26/i_5nlc.htm

Student Questions

- Do we expect this exam to be the same length as the last one?

Yes. 50 minutes.

©2026 Raj Jain

Related Modules



CSE 567: The Art of Computer Systems Performance Analysis
https://www.youtube.com/playlist?list=PLjGG94etKypJEKjNAa1n_1X0bWWNyZcof

CSE4703S: Introduction to Computer Networks (Fall 2011),
https://www.youtube.com/playlist?list=PLjGG94etKypJWOSPMh8Azcgy5e_10TiDw



CSE 570: Recent Advances in Networking (Spring 2013)
https://www.youtube.com/playlist?list=PLjGG94etKypLHyBN8mOgwJLHD2FFIMGq5

CSE571S: Network Security (Spring 2011),
https://www.youtube.com/playlist?list=PLjGG94etKypKvzfVtutHcPFJXumyyg93u



Video Podcasts of Prof. Raj Jain's Lectures,
https://www.youtube.com/channel/UCN4-5wzNP9-ruOzQMs-8NUw

Student Questions

©2026 Raj Jain